

S25H RELAY

SHORI

◆ Features

- 30A general purpose power relay
- SPDT and DPDT contact configurations
- DC and AC coil
- Socket and PCB terminal available

◆ Coil Data (DC)

Rated voltage (V)	Coil Resistance ±10% at 25 ° C (Ω)	Rated Current ± 10% (mA)	Pick up Voltage (Max)	Drop out Voltage (Min)	Max continuous Voltage	Power consumption At rated Voltage
6	29.5	188	95% of rated voltage	10% of rated voltage	110% Max of Rated voltage	Approx.1.2W
12	120	100				
24	472	51				
48	1800	27				
110	10000	11				
125	10000	12.5				

◆ Coil Data (AC)

Rated voltage (V)	Coil Resistance ±10% at 25 ° C (Ω)	Pick up Voltage (Max)	Drop out Voltage (Min)	Max continuous Voltage	Power consumption At rated Voltage
6	4.43	85% of rated voltage	30% of rated voltage	110% Max of Rated voltage	Approx.3.0VA
12	17.7				
24	72				
120	1630				
230	6600				
240	7200				
277	9000				

◆ Contact Rating

Resistive load	30A/250VAC, 20A/28VDC
----------------	-----------------------

◆ Ordering information

S25H - 12VDC -2CS- F
 1 2 3 4 5

- 1. S25H -- Basic series designation
- 2. 12VDC -- Coil Voltage
- 3. 1A -- Single pole normally open
 1B -- Single pole normally closed
 1C -- Single pole double throw
 2A -- Double pole normally open
 2B -- Double pole normally closed
 2C -- Double pole double throw
- 4. S -- Quick connect terminals
 P -- PCB terminals
- 5. Blank --Standard type
 F -- Class F

◆ Specification

Contact material	Ag Alloy	
Contact resistance	100 m Ω Max	
Operate time	25 ms Max	
Release time	20 ms Max	
Insulation resistance	100 M Ω Min. (DC 500V)	
Dielectric strength	Between open contact : AC1500V ,50/60Hz 1 min.	
	Between contact and coil : AC 3000V, 50/60Hz 1 min.	
	Between contact circuits : AC 3000V, 50/60Hz 1 min	
Vibration resistance	Operating extremes	10~50Hz, amplitude 1.5 mm
	Damage limits	10~50Hz, amplitude 1.5 mm
Shock resistance	Operating extremes	10G
	Damage limits	100G
Life expectancy	Mechanical	10,000,000 operations (frequency 18,000 operations/hr)
	Electrical	50,000 operations (frequency 360 operations/hr)
Operating ambient temperature	-30~+55 $^{\circ}$ C (no freezing)	
Weight	Approx 80 g	



S25H RELAY

SHORI

◆ Safety Approval



Certified	UL/CUL	TUV
File No.	E188091	R 50345594

◆ Outline Dimension

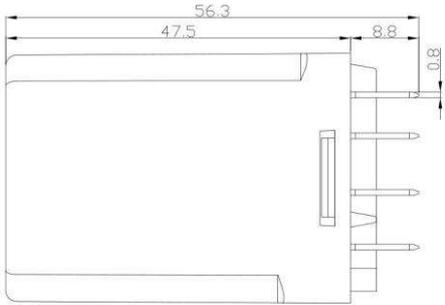


S25H(S)

S25H(P)

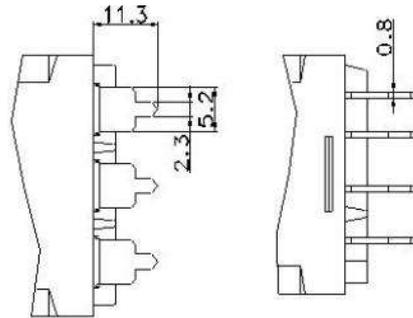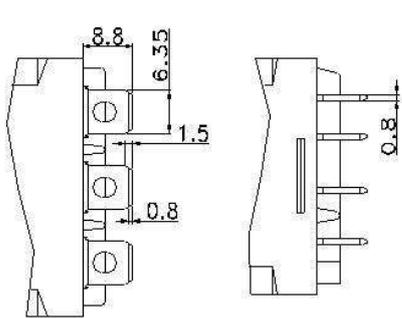


◆ Wiring Diagram(BOTTOM VIEW)


1A




1B




1C



2A



2B



2C

